

# Hi-Q Components



Hi-Q Electronics Ltd, PO Box 302 015, North Harbour, Auckland, New Zealand Ph + 64 9 415 3333 Fax + 64 9 415 8686

## Pin Headers

2.0 mm Pitch

- ★ Current Rating: 1A
- ★ Contacts : Phosphor Bronze
- ★ Housing: PBT 30% Glass UL94VO



Part No 32-113 xx S/D V/R 2.0 mm Pitch  
 xx = No of Contacts V = Straight R = Right Angle  
 S = Single Row 2 to 40 way D = Double Row 4 to 80 way

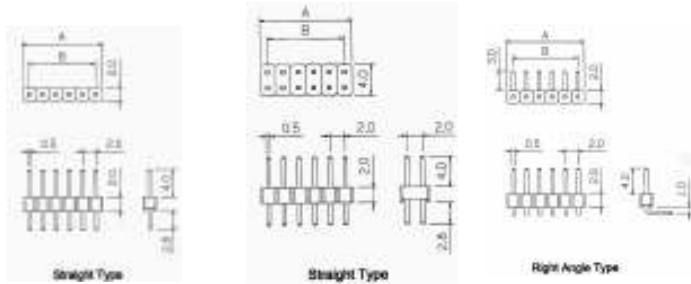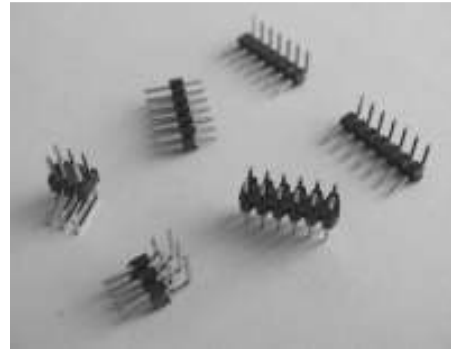

## Mini Jumpers

2.0 mm Pitch

- ★ Current Rating: 1A
- ★ Contacts : Gold Plated Phosphor Bronze
- ★ Housing: PBT 30% Glass UL94VO
- ★ Insulation Resistance : 1000Mohm min. at 500V

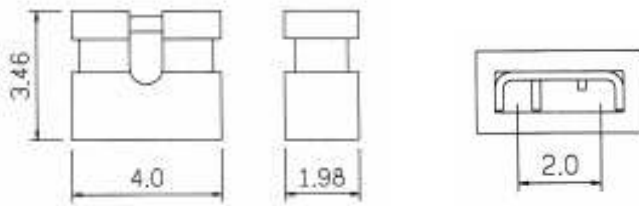

Part No 32-117BG1

## PCB Socket

2.0 mm Pitch

- ★ Gold Plated Phosphor Bronze Contacts.
- ★ Current Rating: 1A
- ★ Housing PBT 30% Glass UL94VO.
- ★ Dielectric Strength: 500VAC for 1 min.
- ★ Operating Temp. -55°C to +105°C.

Part No 32-115 xx S/D V/R 2.0 mm Pitch  
 xx = No of Contacts V = Straight R = Right Angle  
 S = Single Row 2 to 40 way D = Double Row 4 to 80 way

