Hi-Q Components

Hi-Q Electronics Ltd, PO Box 302 015, North Harbour, Auckland, New Zealand Ph + 64 9 415 3333 Fax + 64 9 415 8686

Low cost labour saving PCB Design.

UL, CSA Recognition

Leakage current of 0.8 mA Max.

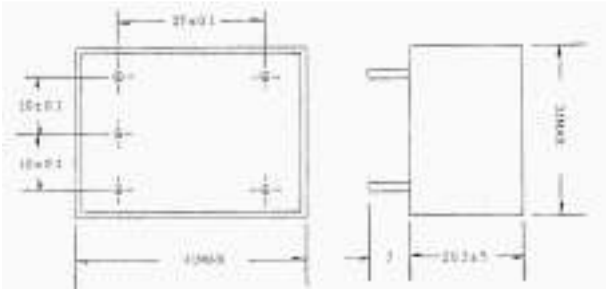

Specifications

Typical Common Mode Attenuation (dB):

Part Number	Current Rating	0.15 MHz	0.5 MHz	1.0 MHz	5.0 MHz	10 MHz	30 MHz
33-OYF01T6	1A	38	55	52	49	54	36
33-OYF03T6	3A	27	36	41	41	43	32

Rated Voltage : 115/250 vAC 50/60 Hz
Operating Temperature: -25°C to 85°C
Leakage Current : 0.8mA max.
Test Voltage :
Line to Line 1450vDC 1 minute
Line to Ground 2250vDC 1 minute
Insu**lation Resistance**: 1000 MΩ Min 250V DC
Direct Current Resistance: 0.5 Ω (OYF01T6)
0.2 Ω
(OYF03T6)
Temperature Rise: 35°C Max.

OYF01T6

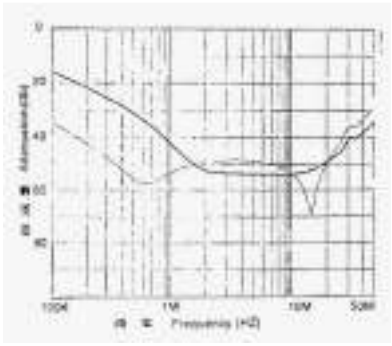

Normal Mode
Common Mode

OYF03T6

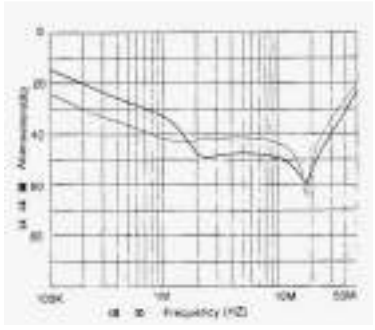
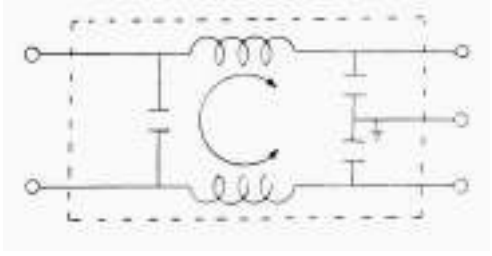
Electrical Schematic