


# Hi-Q Components

Hi-Q Electronics Ltd, PO Box 302 015, North Harbour, Auckland, New Zealand Ph + 64 9 415 3333 Fax + 64 9 415 8686


## Magnetic Speakers

### Features

- ★ Compact Size
- ★ Natural Sound
- ★ High Sound Output
- ★ Good Frequency Response

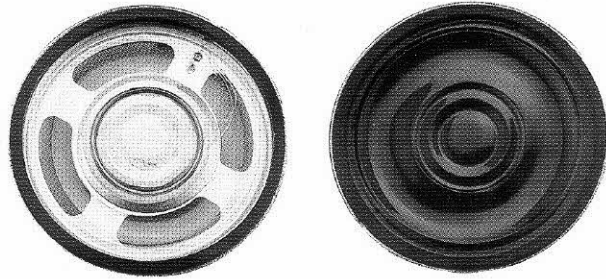

Dimensions: mm ±0.2

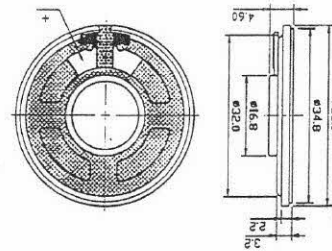

Frequency Response Curve  
at distance 0.5 metre





### Specifications

	Part No. <b>55-3608CSF-50BD</b>
Dimensions	Diameter 36mm Baffle Opening 32.5mm
Power Rating	500mW /Max 1000mW
Nominal Impedance	8 ohms ± 15% @ 1200Hz
Frequency Range	350~10000Hz (Av SPL -10dB)
Lowest Resonant Freq.	530 ± 150Hz
Distortion	5% Max. @ 1000Hz 100mW
Output Sound Pressure Level (SPL)	85 ± 3dB /0.1watt /0.5 meter Av. @ 800,1000,1200,1500Hz
Magnet	Size 12.5mmØ x 1.5mm
Load Test	White Noise with Weighted Filter 2.0volts RMS 24Hrs
Abnormal Sound Test	2.0 volts sine wave
Polarity	Forward diaphragm movement When positive DC current applied to + or marked terminal
Weight	7.5gms

## Magnetic Speakers

## Miniature Types



55-23008G-01

55-MS30008

### Specifications

	Part No. <b>55-23008G-01</b>	Part No. <b>55-MS30008</b>
Power (Nominal)	0.1 W	0.15 W
Power (Max.)	0.2 W	0.2 W
Freq. Range	1100 – 12000 Hz	700 - 4000
Resonant Freq.	1900Hz ± 20%	1100 ± 150 Hz
Sound O/P (0.1W,1Khz,0.5m)	71 dB	83 dB
Nominal Impedance	8 Ω	8 Ω

