


# Hi-Q Components

Hi-Q Electronics Ltd, PO Box 302 015, North Harbour, Auckland, New Zealand Ph + 64 9 415 3333 Fax + 64 9 415 8686

## Standard Strap Type



- ★ Manufactured from tough, durable Nylon 6/6 with a flammability rating of UL 94V2.
- ★ Tensile strength meets MIL-S-23190D (PCV type) MIL-S-23190E (NT type)

Part Number	Length L mm	Width W mm	Bundle Max. Dia.	Min. Tensile Strength Kg
15-PCV075/2.4	75	2.4	14	8
15-NT08025	80	2.5	16	8.2
15-NT10025	100	2.5	20	8.2
15-PCV100/2.5*	100	2.5	20	8
15-PCV120/2.5	120	2.5	28	8
15-PCV120/3.2	120	3.2	28	18
15-PCV140/2.5	142	2.5	33	8
15-PCV140/3.2	142	3.2	33	18
15-NT14036	140	3.6	32	18.2
15-PCV150/3.6	150	3.6	34	18
15-NT16025	160	2.5	38	8.2
15-PCV180/4.0	180	4.0	45	22
15-NT20025	200	2.5	50	8.2
15-PCV200/2.5	203	2.5	52	8
15-PCV200/3.2	203	3.2	52	18
15-NT20036	200	3.6	50	18.2
15-PCV200/4.6	203	4.6	50	22
15-PCV250/3.6	250	3.6	68	18
15-PCV250/4.8	250	4.8	68	22
15-NT25048	250	4.8	68	22.2
15-PCV292/3.6	292	3.6	80	18
15-NT29536	295	3.6	82	18.2
15-NT29548	295	4.8	82	22.2
15-PCV300/7.6	300	7.9	80	55
15-PCV310/4.8	310	4.8	87	22
15-NT37048	370	4.8	107	22.2
15-PCV340/7.6W*	340	7.6	92	55
15-PCV450/8.0W*	450	8.0	130	80
15-PCV914/4.8	914	4.8	275	22

Std Stock in Natural Nylon 6/6. Suffix W\* denotes Black UV weather resistant on PCV Types. Add suffix B to Part No. for NT Types in Black UV weather resistant.

## Releasable Cable Ties

- ★ Easy finger catch good for temporary fastening.



**Heavy Duty**  
PCR125/8.0 / PCR200/8.0

Part Number	Length L mm	Width W mm	Max. Dia. Bundle	Min. Tensile Strength
15-PCR125/8.0	125	7.6	30	22 Kg
15-PCR200/8.0	200	7.6	39	22 Kg

## Tie Guns



### 30-TG6

Economy Type  
Twist to cut.  
For Tie Width 2.5~5.0mm



### 30-TG-7

Tension Adjust.  
Automatic cut  
For Tie Width 2.5~5.0mm



### 30-TG-9

For Tie Width 2.5~10.0mm



# Hi-Q Components

Hi-Q Electronics Ltd, PO Box 302 015, North Harbour, Auckland, New Zealand Ph + 64 9 415 3333 Fax + 64 9 415 8686

## Cable Ties - Misc. Strap Type

### Screw Hole Mounting PCW Series




- ★ Anchor your cables quickly with integral screw hole mount.

Part Number	Length L mm	Width W mm	Bundle Max. Dia.	Min. Tensile Strength	Mounting Hole mm
15-PCW155/3.7	155	3.7	40	18 Kg	4.6-5.0
15-PCW205/4.2	205	4.2	60	23 Kg	4.6-5.0

UL Approved Nylon 6/6

### Marker Ties

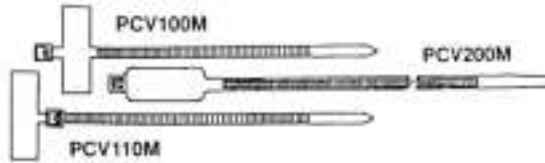

- ★ Tie and identify bundles of cable in one operation.

Part Number	Length L mm	Width W mm	Bundle Max. Dia.	Min. Tensile Strength
15-PCV100M	100	2.5	25	8 Kg
15-PCV110M	110	2.5	25	8 Kg
15-PCV200M	200	4.6	50	22 Kg

UL Approved Nylon 6/6

### Push Mount PCX Type



- ★ Simple one piece mounting and harness.
- ★ Locks quickly into 4.8mm Hole.

Part Number	Length L mm	Width W mm	Bundle Max. Dia.	Min. Tensile Strength
15-PCX155/3.5	155	3.5	40	18 Kg


UL Approved Nylon 6/6

### Hanking Tie

Polyethylene Clear



PCT140



PCT160

- ★ Tidy up your electrical cords for packaging and shipment.


Part Number	Length L mm	Width W mm	Bundle Max. Dia.	Min. Tensile Strength
15-PCT140/9.0	140	9	38	8 Kg
15-PCT160/9.0	160	9	45	8 Kg



### Beaded Ties

- ★ Easy to install and release.

Part Number	Length L mm	Max. Dia Bundle
15-PBV108	108	29
15-PBV152	152	43
15-PBV203	203	62



Label Types also available

UL Approved Nylon 6/6 Natural

# Hi-Q Components



Hi-Q Electronics Ltd, PO Box 302 015, North Harbour, Auckland, New Zealand Ph + 64 9 415 3333 Fax + 64 9 415 8686

## Twist Type Tie

- ★ A simple twist of the fingers and the tie is secure.
- ★ Another twist and it is released.
- ★ Tidy up random wiring.

Part Number	W Dia. mm	L mm
15-PLC06	5.1 – 6.9	22.2
15-PLC10	10.2 – 12.7	30.5
15-PLC16	13.9 – 16.5	32.0
15-PLC18	17.8 – 20.3	39.4
15-PLC37	36.8 – 39.4	67.8
15-PLC48	48.3 – 50.8	87.9

UL Approved Nylon 6/6 Natural or Black




## Spacer Twist Tie

- ★ Keep cables away from hot components.
- ★ Cables secured and supported with a twist.
- ★ Locks quickly into a 4.8mm hole.

Part Number	Max Bundle Diameter W	A mm	H mm
15-PSC11/4	11	4	30
15-PSC11/18	11	18	30
15-PSC5/6	5	6	22
15-PSC6/24	6	24	22
15-PSC6/31	6	31	22

UL Approved Nylon 6/6



## Spiral Wrap Cabling

- ★ Versatile and reusable wrapping for wiring.
- ★ Protect wires from abrasion and flexing.
- ★ Spiral expands to size required.

### Polyethylene Natural.

Part Number	D Mm	D1 Mm	W mm	Bundle Range Dia
15-KS03	2	3	5	2 - 6
15-KS06	4	6	7.0	4 - 15
15-KS08	6	8	10.8	6 - 25
15-KS10	7.5	10	11.4	8 - 40

Supplied in 10m rolls

### UV Resistant Black Polyethylene. Suitable for outdoor use.

Part Number	D mm	D1 mm	W mm	Bundle Range Dia
15-KWB03	2	3.2	7	2 - 7
15-KWB06	3	6.3	9	3 - 25
15-KWB10	7	9.5	11	7 - 40
15-KWB13	11	12.7	13	11 - 60

Supplied by the metre

