

## Heat Shrinking Sleeve Flat

### Heat Shrinking Sleeve Flat

Used for colour distinction and insulation.  
To be shrunk by blower or hot water.

Maximum Service Temp 80°C


#### Colour

Available in, red, white, blue and black


#### Material

Rigid Shrinkable PVC

Sold in 100m rolls

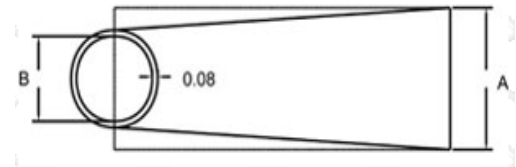

Part Number	A	B	Shrinkable Range
28-HSF065	6.5	4.1	6.5-3.6
28-HSF085	8.5	5.2	8.5-4.5
28-HSF12	12	7.6	12-6.5
28-HSF15	15	10	15-8.5
28-HSF20	20	13	20-11
28-HSF30	30	19	20-11
28-HSF40	40	25	40-22
28-HSF50	50	32	50-28
28-HSF60	60	38	60-33
28-HSF70	70	44	70-37
28-HSF80	80	50	80-42
28-HSF100	100	63	100-55

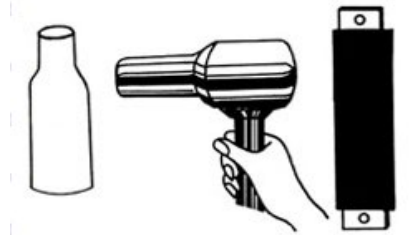

## Heat Shrinking Sleeve Round

### Features

Insulation or jacketing of wire harnesses  
Insualtion of wire terminals


#### Colour

Stock colour is black

#### Material

Polyolefin

Sold by the meter

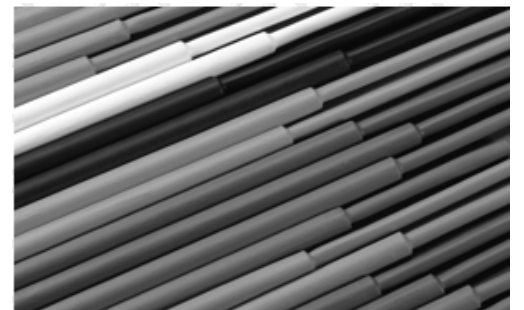

Part Number	As Supplied		After Shrinkage	
	Inside Dia Min	Wall Thickness Nominal	Inside Dia Max	Wall Thickness Nominal
28-HSR054BLK	5.4+0.3	0.25	2.5	0.56
28-HSR084BLK	8.4+0.4	0.25	4.0	0.56