


Plastic Line | Steel

Black Polyamide Plastic Base 40 Diameter - 30 Deg. Articulated Steel Screw

Static Load Newton 10000 • 12 Socket • Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H
11-FBP12-40	11-ASS12-8-025	M8X25	27	25	40	12	M8	16.5	52
11-FBP12-40	11-ASS12-8-050	M8X50	27	50	40	12	M8	16.5	77
11-FBP12-40	11-ASS12-8-075	M8X75	27	75	40	12	M8	16.5	102
11-FBP12-40	11-ASS12-10-050	M10X50	27	50	40	12	M10	16.5	77
11-FBP12-40	11-ASS12-10-100	M10X100	27	100	40	12	M10	16.5	127
11-FBP12-40	11-ASS12-10-125	M10X125	27	125	40	12	M10	16.5	152
11-FBP12-40	11-ASS12-12-075	M12X75	27	75	40	12	M12	16.5	102
11-FBP12-40	11-ASS12-12-100	M12X100	27	100	40	12	M12	16.5	127
11-FBP12-40	11-ASS12-12-125	M12X125	27	125	40	12	M12	16.5	152
11-FBP12-40	11-ASS12-12-150	M12X150	27	150	40	12	M12	16.5	177

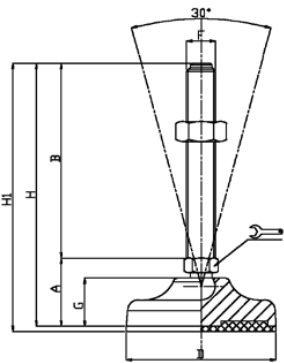


Two piece part

Black Polyamide Plastic Base 50 Diameter - 30 Deg. Articulated Steel Screw

Static Load Newton 11000 • 12 Socket • Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H
11-FBP12-50	11-ASS12-10-050	M10X50	30	50	50	14	M10	20	80
11-FBP12-50	11-ASS12-10-100	M10X100	30	100	50	14	M10	20	133
11-FBP12-50	11-ASS12-10-125	M10X125	30	125	50	14	M10	20	155
11-FBP12-50	11-ASS12-12-075	M12X75	30	75	50	14	M12	20	105
11-FBP12-50	11-ASS12-12-100	M12X100	30	100	50	14	M12	20	130
11-FBP12-50	11-ASS12-12-125	M12X125	30	125	50	14	M12	20	155

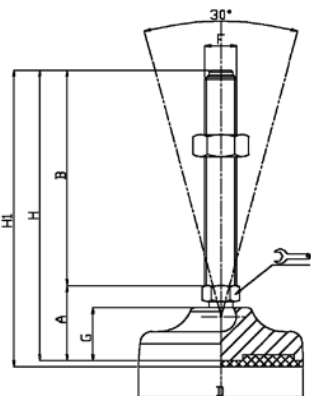

Two piece part

ADJUSTABLE LEVELLING FEET

HOW TO ORDER

STEP 01

SCREW MATERIAL

ZINC PLATED STEEL
STAINLESS STEEL



STEP 02

SCREW SOCKET SIZE

12 SOCKET - SUITED TO M8 - M12
15 SOCKET - SUITED TO M10 - M20



STEP 03

THREAD SIZE & LENGTH

THREAD SIZES RANGE FROM
M8 - M20.

AVAILABLE THREAD LENGTHS:
25 - 225MM



STEP 04

PLASTIC BASES

MATCH YOUR BASE SOCKET SIZE
TO THE SAME SOCKET SIZE AS
YOUR SCREW.

12 SOCKET - SUITED TO M8 - M12
15 SOCKET - SUITED TO M10 - M20



CHOOSE YOUR BASE DIAMETER.
40MM TO 123MM AVAILABLE.

HOT TIP: IT IS VERY IMPORTANT THAT THE SOCKET SIZE YOU CHOOSE FOR
YOUR SCREW (12 OR 15), MATCHES THE SOCKET SIZE OF YOUR BASE.

NEED MORE GRIP ON YOUR LEVELLING FEET?

OPTIONAL NON SKID RUBBER PAD AVAILABLE. MATCH THE DIAMETER OF YOUR BASE TO THE PAD YOU NEED.



PART NUMBER BREAKDOWN

SCREW PART NUMBER

ASS = ZINC PLATED STEEL
ASSS = STAINLESS STEEL
(EXAMPLE = ZINC PLATED SCREW)

050 = 50MM
THREAD LENGTH

↑
11-ASS15-10-050

↓
15 = SOCKET SIZE

↓
10 = M10 THREAD

STEP 05

BASE PART NUMBER

50 = DIAMETER SIZE

↑
11-FPB15-50

↓
15 = SOCKET SIZE

Hi-Q
components