


Plastic Line | Stainless Steel

Black Polyamide Plastic Base 50 Diameter - 30 Degree Articulated Stainless Steel Screw

Static Load 11000 Newton • 15 Socket • Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H
11-FBP15-50	11-ASSS15-10-050	M10X50	30	50	50	14	M10	20	80
11-FBP15-50	11-ASSS15-10-100	M10X100	30	100	50	14	M10	20	130
11-FBP15-50	11-ASSS15-10-125	M10X125	30	125	50	14	M10	20	155
11-FBP15-50	11-ASSS15-12-075	M12X75	30	75	50	14	M12	20	105
11-FBP15-50	11-ASSS15-12-100	M12X100	30	100	50	14	M12	20	130
11-FBP15-50	11-ASSS15-12-125	M12X125	30	125	50	14	M12	20	155




Two piece part

Black Polyamide Plastic Base 65 Diameter - 30 Deg. Articulated Stainless Steel Screw

Static Load 11000 Newton • 15 Socket • Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H	Load
11-FBP15-65	11-ASSS15-10-050	M10X50	33	50	65	14	M10	23	83	1100 Newton
11-FBP15-65	11-ASSS15-10-100	M10X100	33	100	65	14	M10	23	133	
11-FBP15-65	11-ASSS15-10-125	M10X125	33	125	65	14	M10	23	158	
11-FBP15-65	11-ASSS15-12-075	M12X75	33	75	65	14	M12	23	108	
11-FBP15-65	11-ASSS15-12-100	M12X100	33	100	65	14	M12	23	133	
11-FBP15-65	11-ASSS15-12-125	M12X125	33	125	65	14	M12	23	158	
11-FBP15-65	11-ASSS15-16-075	M16X75	37	75	65	14	M16	23	112	1500 Newton
11-FBP15-65	11-ASSS15-16-100	M16X100	37	100	65	14	M16	23	137	
11-FBP15-65	11-ASSS15-16-125	M16X125	37	125	65	14	M16	23	162	
11-FBP15-65	11-ASSS15-16-150	M16X150	37	150	65	14	M16	23	187	
11-FBP15-65	11-ASSS15-16-175	M16X175	37	175	65	14	M16	23	212	
11-FBP15-65	11-ASSS15-20-100	M20X100	37	100	65	14	M20	23	137	
11-FBP15-65	11-ASSS15-20-150	M20X150	37	150	65	14	M20	23	187	
11-FBP15-65	11-ASSS15-20-175	M20X175	37	175	65	14	M20	23	212	
11-FBP15-66	11-ASSS15-20-200	M20X200	37	200	65	14	M20	23	237	



Two piece part

Plastic Line


Black Polyamide Plastic Base 83 Diameter - 30 Deg. Articulated Stainless Steel Screw

Static Load Newton M10-M12 15000, M16-M20 20000

• 15 Socket

• Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H
11-FBP15-83	11-ASSS15-10-050	M10X50	38	50	83	14	M10	27	88
11-FBP15-83	11-ASSS15-10-100	M10X100	38	100	83	14	M10	27	138
11-FBP15-83	11-ASSS15-10-125	M10X125	38	125	83	14	M10	27	163
11-FBP15-83	11-ASSS15-12-075	M12X75	38	75	83	14	M12	27	113
11-FBP15-83	11-ASSS15-12-100	M12X100	38	100	83	14	M12	27	138
11-FBP15-83	11-ASSS15-12-125	M12X125	38	125	83	14	M12	27	163
11-FBP15-83	11-ASSS15-12-150	M12X150	38	150	83	14	M12	27	191
11-FBP15-83	11-ASSS15-16-075	M16X75	41	75	83	13	M16	27	116
11-FBP15-83	11-ASSS15-16-100	M16X100	41	100	83	13	M16	27	141
11-FBP15-83	11-ASSS15-16-125	M16X125	41	125	83	13	M16	27	166
11-FBP15-83	11-ASSS15-16-150	M16X150	41	150	83	13	M16	27	191
11-FBP15-83	11-ASSS15-16-175	M16X175	41	175	83	13	M16	27	216
11-FBP15-83	11-ASSS15-20-100	M20X100	41	100	83	13	M20	27	141
11-FBP15-83	11-ASSS15-20-150	M20X150	41	150	83	13	M20	27	191
11-FBP15-83	11-ASSS15-20-175	M20X175	41	175	83	13	M20	27	216
11-FBP15-83	11-ASSS15-20-200	M20X200	41	200	83	13	M20	27	241

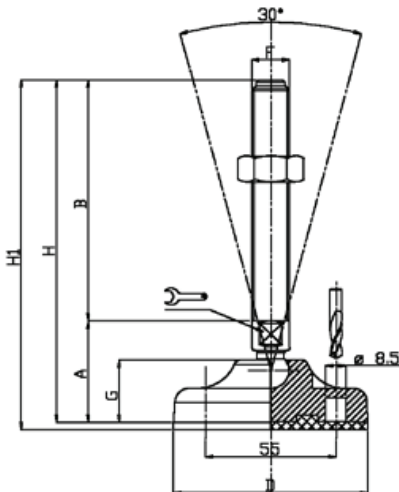


Two piece part

Plastic Line

Black Polyamide Plastic Base 103 Diameter - 30 Deg. Articulated Stainless Steel Screw

Static Load Newton 25000 • 15 Socket • Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H
11-FBP15-103	11-ASSS15-16-075	M16X75	51	75	103	20	M16	32	126
11-FBP15-103	11-ASSS15-16-100	M16X100	51	100	103	20	M16	32	151
11-FBP15-103	11-ASSS15-16-125	M16X125	51	125	103	20	M16	32	176
11-FBP15-103	11-ASSS15-16-150	M16X150	51	150	103	20	M16	32	201
11-FBP15-103	11-ASSS15-16-175	M16X175	51	175	103	20	M16	32	226
11-FBP15-103	11-ASSS15-20-100	M20X100	51	100	103	20	M20	32	151
11-FBP15-103	11-ASSS15-20-150	M20X150	51	150	103	20	M20	32	201
11-FBP15-103	11-ASSS15-20-175	M20X175	51	175	103	20	M20	32	226
11-FBP15-103	11-ASSS15-20-200	M20X200	51	200	103	20	M20	32	251




Two piece part

Black Polyamide Plastic Base 123 Diameter - 30 Deg. Articulated Stainless Steel Screw

Static Load Newton 35000 • 15 Socket • Non-Skid NBR Rubber 70 shore pads available

Part no. Base	Part no. Screw	Screw	S	B	D	Adjust	F	G	H
11-FBP15-123	11-ASSS15-16-075	M16X75	57	75	123	20	M16	37	132
11-FBP15-123	11-ASSS15-16-100	M16X100	57	100	123	20	M16	37	157
11-FBP15-123	11-ASSS15-16-125	M16X125	57	125	123	20	M16	37	182
11-FBP15-123	11-ASSS15-16-150	M16X150	57	150	123	20	M16	37	207
11-FBP15-123	11-ASSS15-16-175	M16X175	57	175	123	20	M16	37	232
11-FBP15-123	11-ASSS15-20-100	M20X100	57	100	123	20	M20	37	157
11-FBP15-123	11-ASSS15-20-150	M20X150	57	150	123	20	M20	37	207
11-FBP15-123	11-ASSS15-20-175	M20X175	57	175	123	20	M20	37	232
11-FBP15-123	11-ASSS15-20-200	M20X200	57	200	123	20	M20	37	257

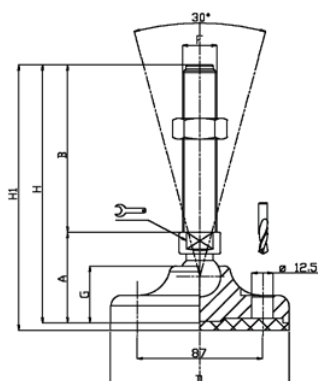

Two piece part

ADJUSTABLE LEVELLING FEET

HOW TO ORDER

STEP 01

SCREW MATERIAL

ZINC PLATED STEEL
STAINLESS STEEL



STEP 02

SCREW SOCKET SIZE

12 SOCKET - SUITED TO M8 - M12
15 SOCKET - SUITED TO M10 - M20



STEP 03

THREAD SIZE & LENGTH

THREAD SIZES RANGE FROM
M8 - M20.

AVAILABLE THREAD LENGTHS:
25 - 225MM



STEP 04

PLASTIC BASES

MATCH YOUR BASE SOCKET SIZE
TO THE SAME SOCKET SIZE AS
YOUR SCREW.

12 SOCKET - SUITED TO M8 - M12
15 SOCKET - SUITED TO M10 - M20



CHOOSE YOUR BASE DIAMETER.
40MM TO 123MM AVAILABLE.

HOT TIP: IT IS VERY IMPORTANT THAT THE SOCKET SIZE YOU CHOOSE FOR
YOUR SCREW (12 OR 15), MATCHES THE SOCKET SIZE OF YOUR BASE.

NEED MORE GRIP ON YOUR LEVELLING FEET?

OPTIONAL NON SKID RUBBER PAD AVAILABLE. MATCH THE DIAMETER OF YOUR BASE TO THE PAD YOU NEED.



PART NUMBER BREAKDOWN

SCREW PART NUMBER

ASS = ZINC PLATED STEEL
ASSS = STAINLESS STEEL
(EXAMPLE = ZINC PLATED SCREW)

050 = 50MM
THREAD LENGTH

↑
11-ASS15-10-050

↓
15 = SOCKET SIZE

↓
10 = M10 THREAD

STEP 05

BASE PART NUMBER

50 = DIAMETER SIZE

↑
11-FPB15-50

↓
15 = SOCKET SIZE

Hi-Q
components